



# Simple Type Furniture Pocket Door -Installation Instruction

## Installation Parameters


≤30kg

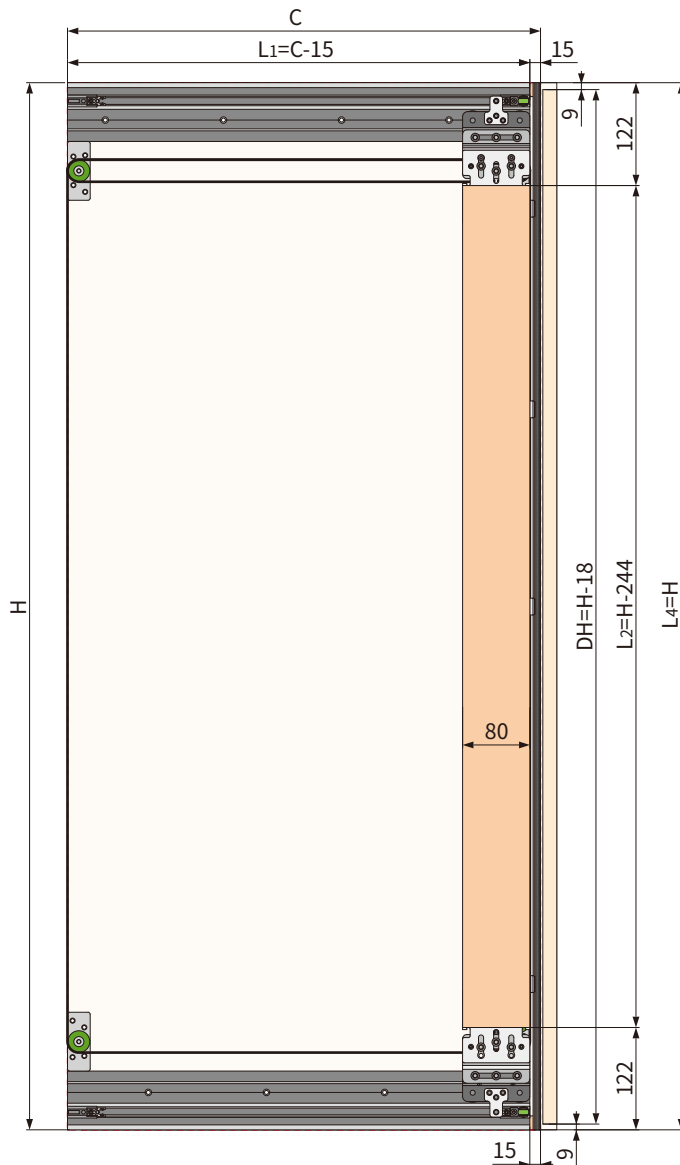

|     |                                             |     |                                        |
|-----|---------------------------------------------|-----|----------------------------------------|
| A   | Door sheet thickness                        | L1  | Upper & bottom track length            |
| C   | Cabinet depth                               | L2  | Vertical sheet length                  |
| C1  | Connected board depth                       | L3  | Connecting plate length                |
| H   | Cabinet height                              | L4  | Weather strip profile & Brusher length |
| W   | Cabinet width                               | DW  | Door sheet width                       |
| DH  | Door sheet height                           | DW1 | Pocket depth for hiding door           |
| DH1 | Measurements for making holes on door panel |     |                                        |

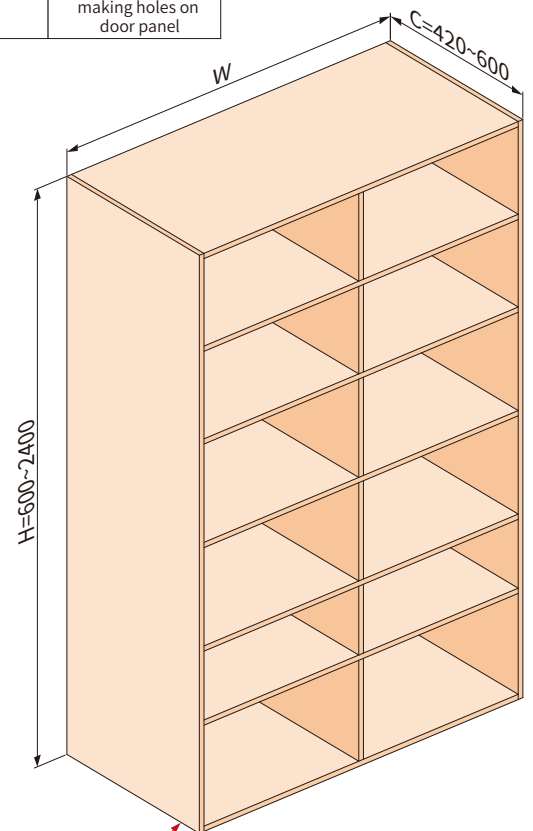

Notice: Don't have skirting line.


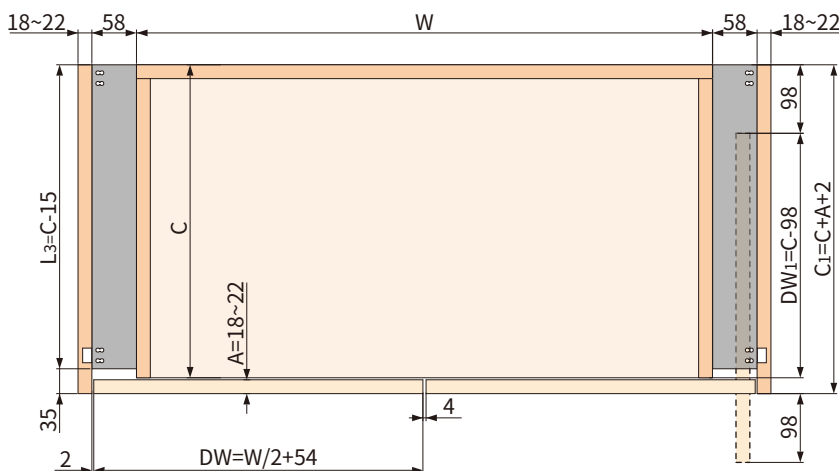



(when)  $DW = C1$ :  $DW - C1 + 98 = 98$   
(Size of the door section left outside the pocket is acceptable)

(when)  $DW > C1$ :  $DW - C1 + 98 > 98$   
(Size of the door section left outside the pocket is big)


(when)  $DW < C1$ :  $DW - C1 + 98 < 98$   
(Size of the door section left outside the pocket is small)

## Installation parameters

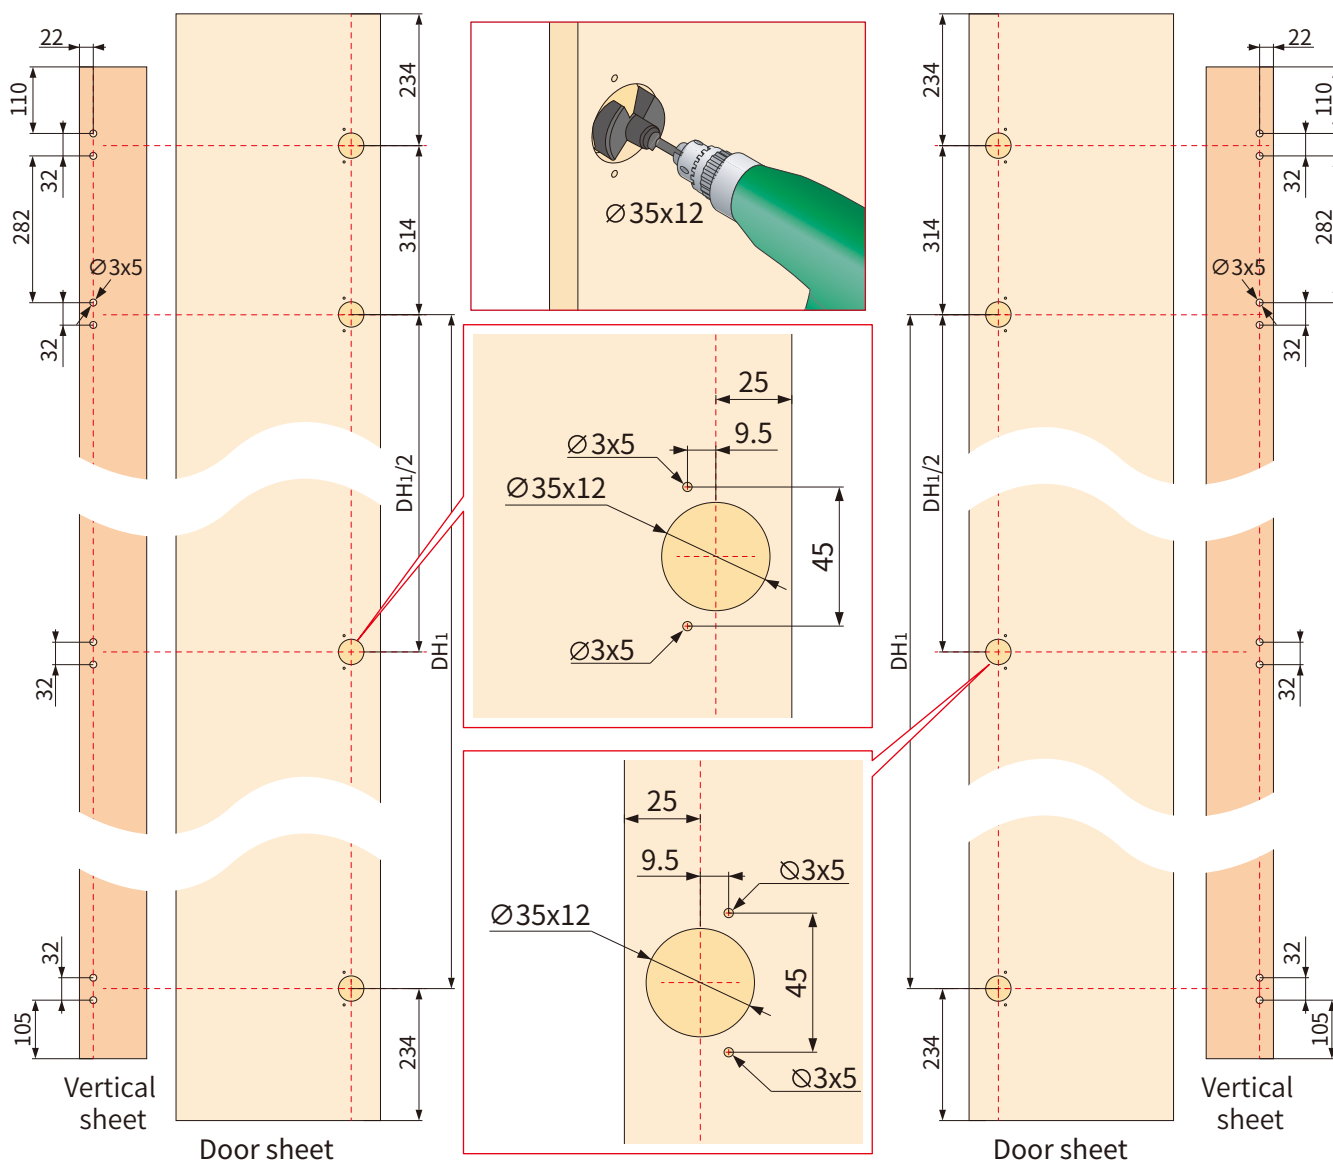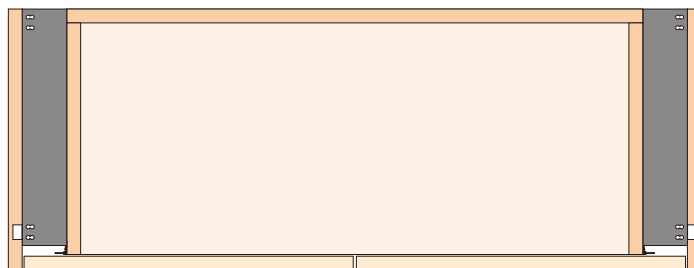


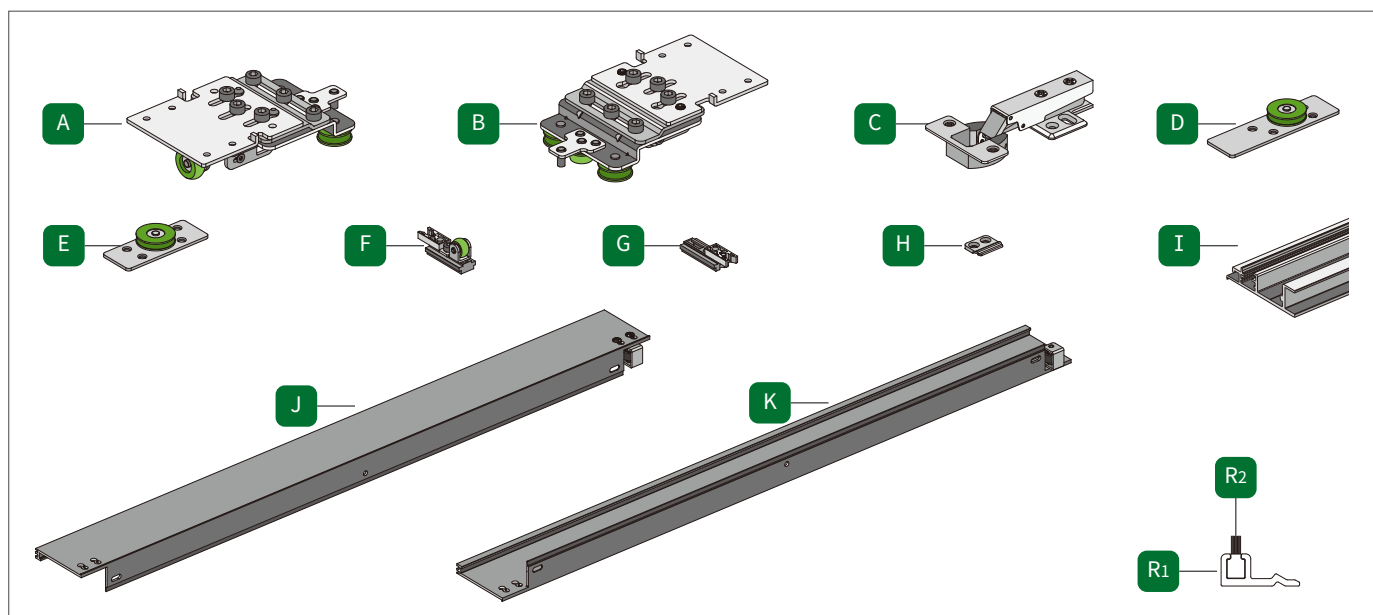

## 1 Cutting tracks

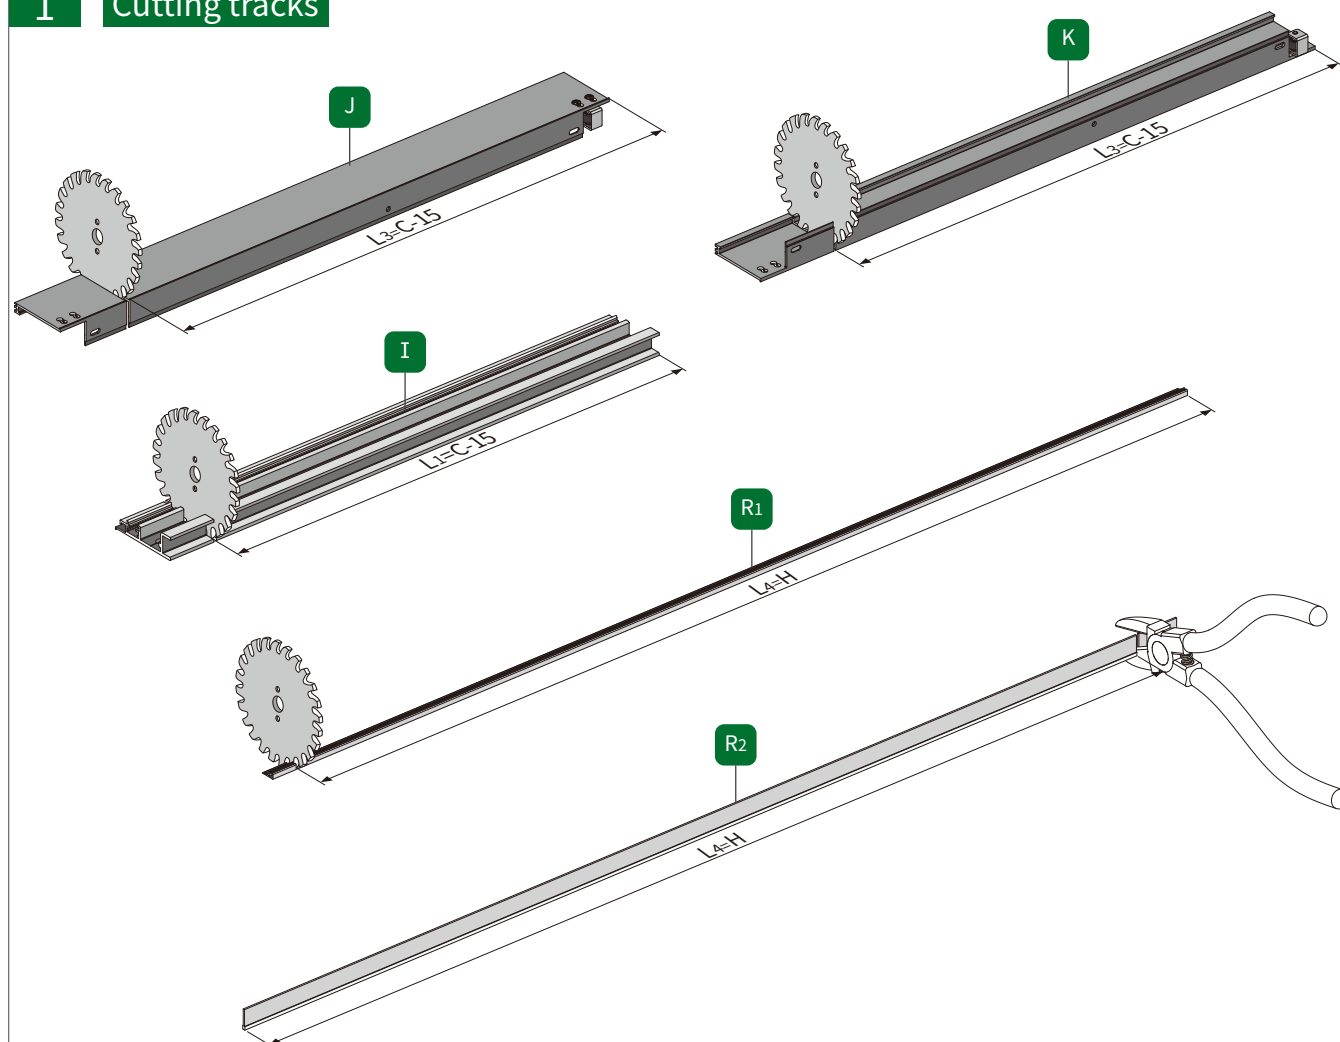


## 2 Install fittings on door sheet

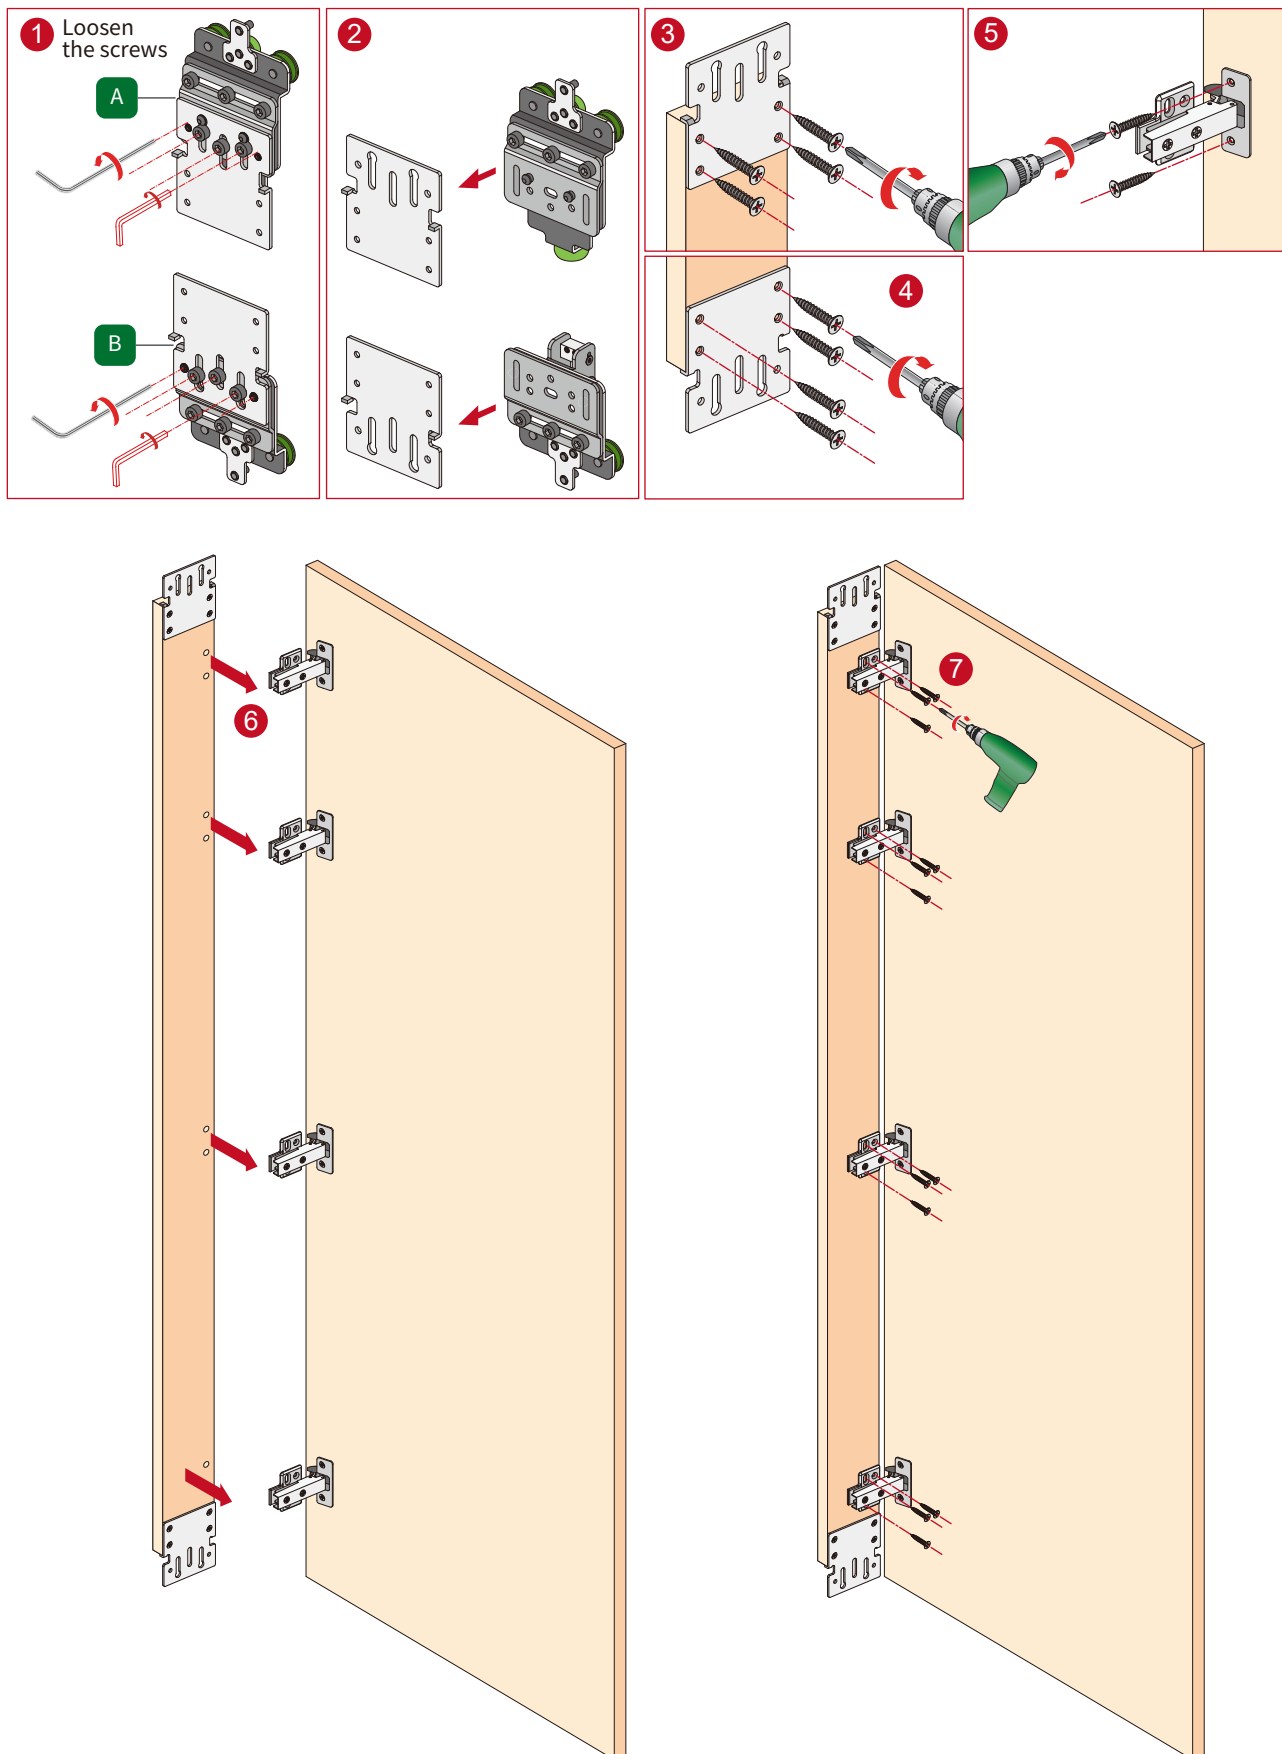



### 3 Install upper & bottom track




Upper subassembly is the one with hook and supporting wheel




Make sure the cabinet is level and vertical



Align with the cabinet side then fix

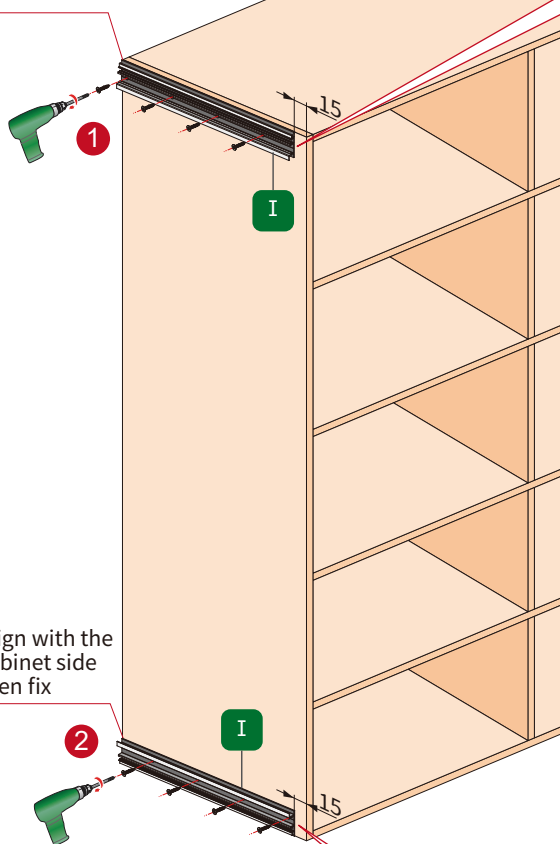


Align with the cabinet side then fix





Bottom roller

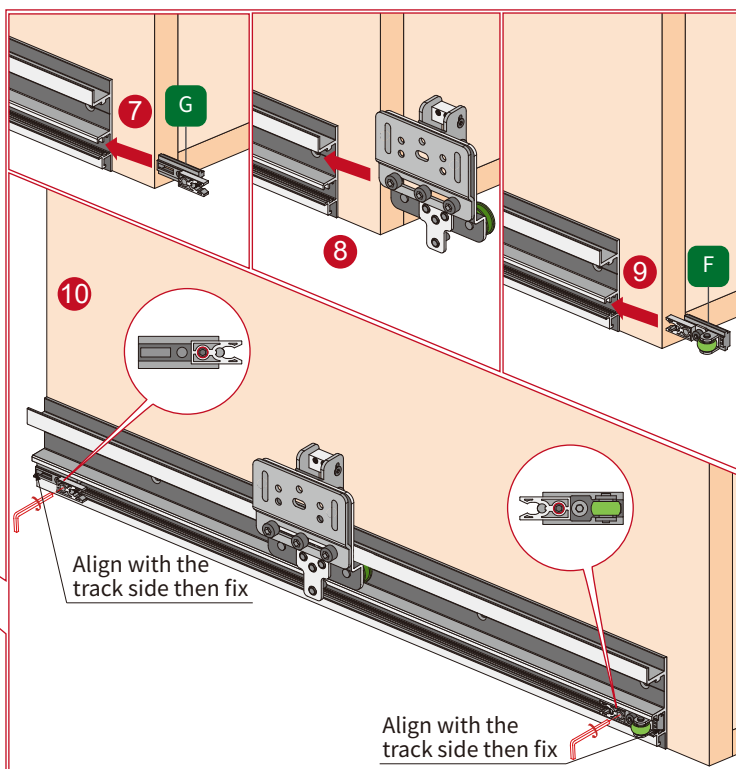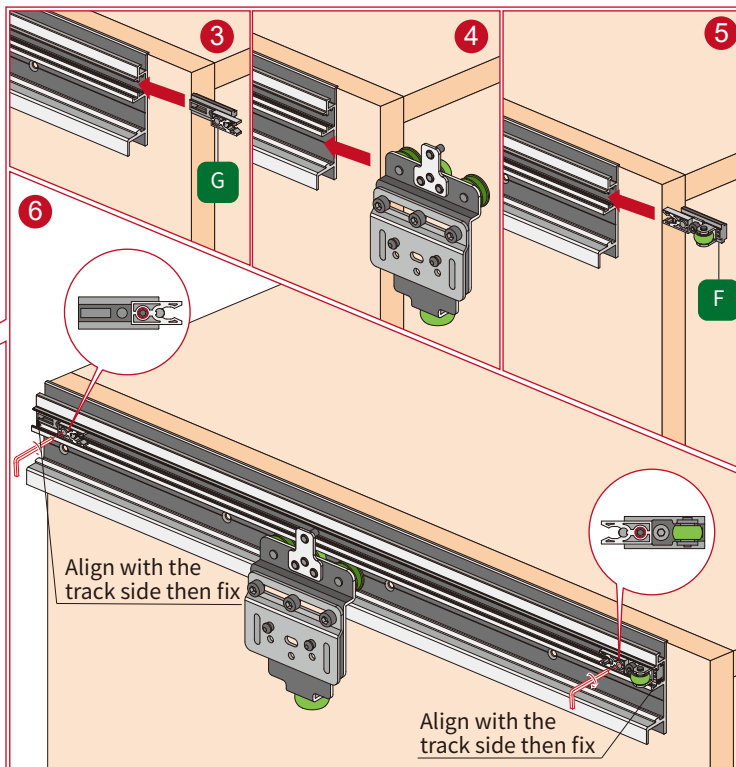




## 4 Install door opener seat

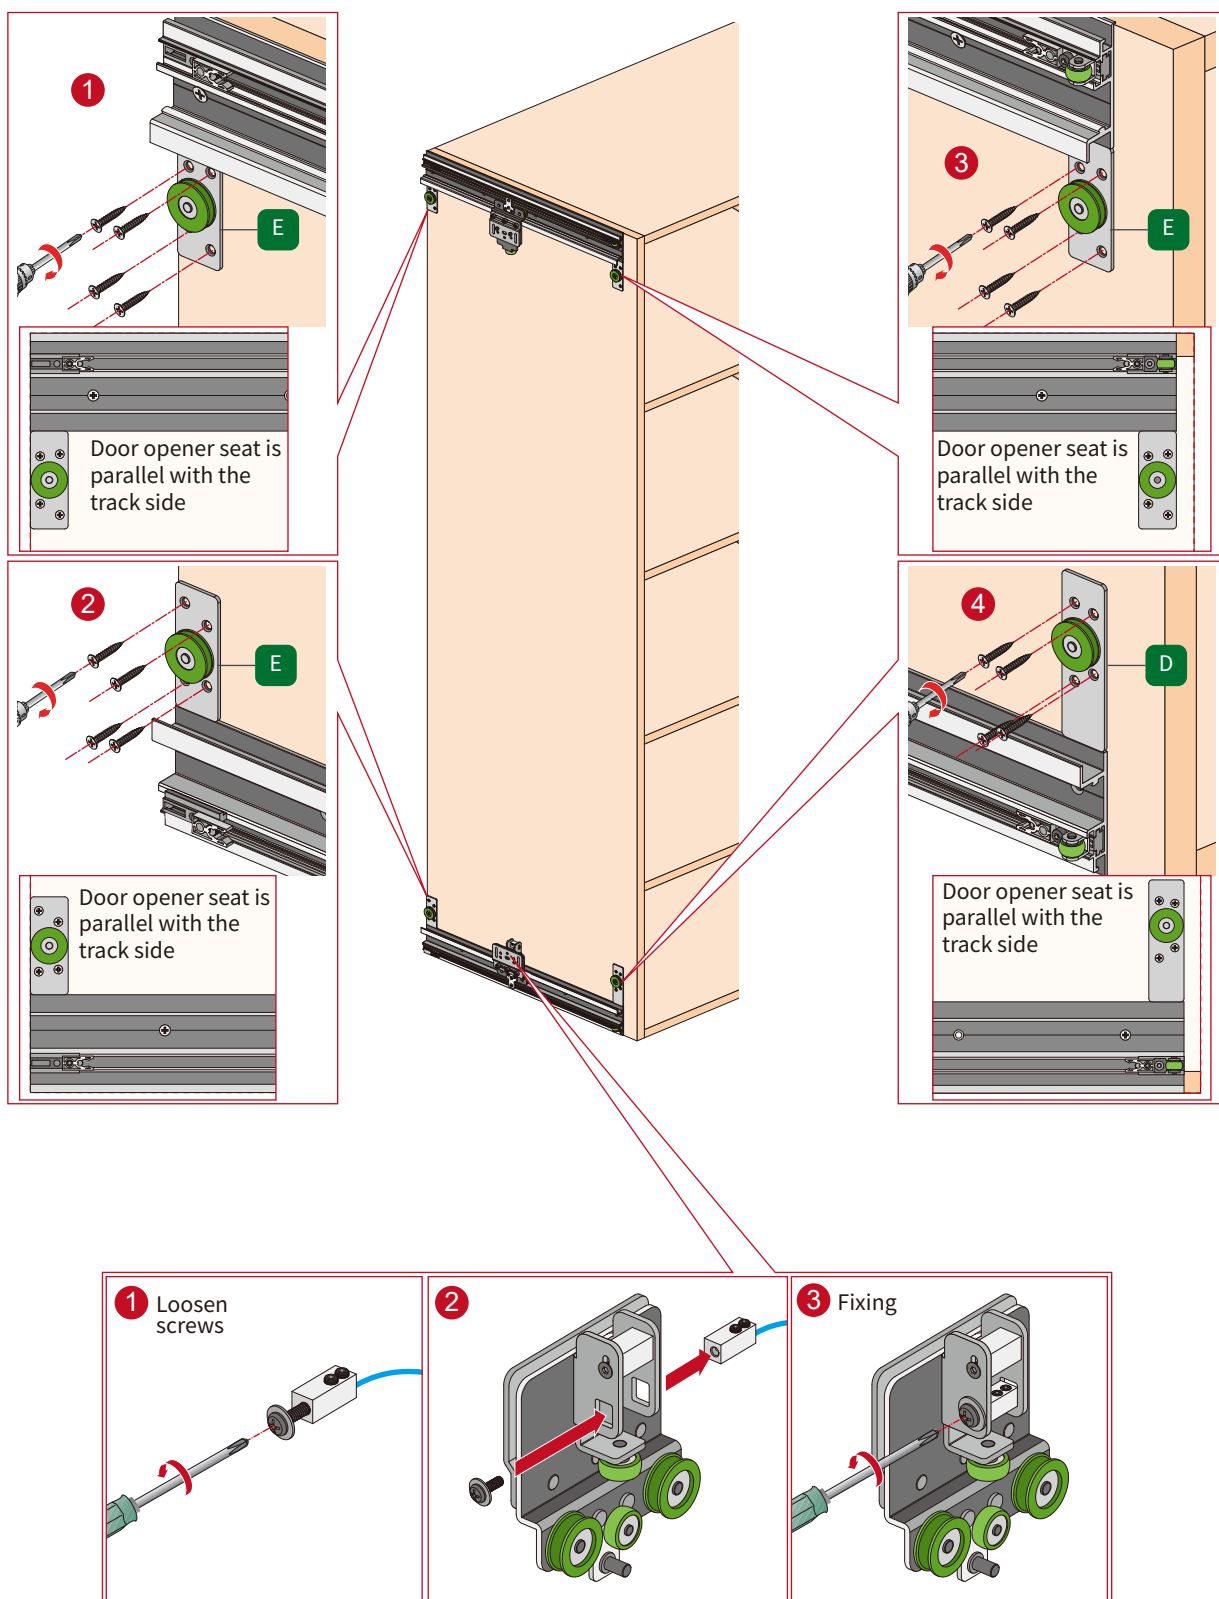


## 5 Install plastic fixed part

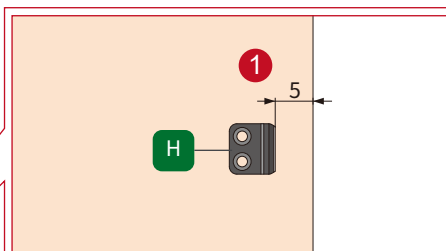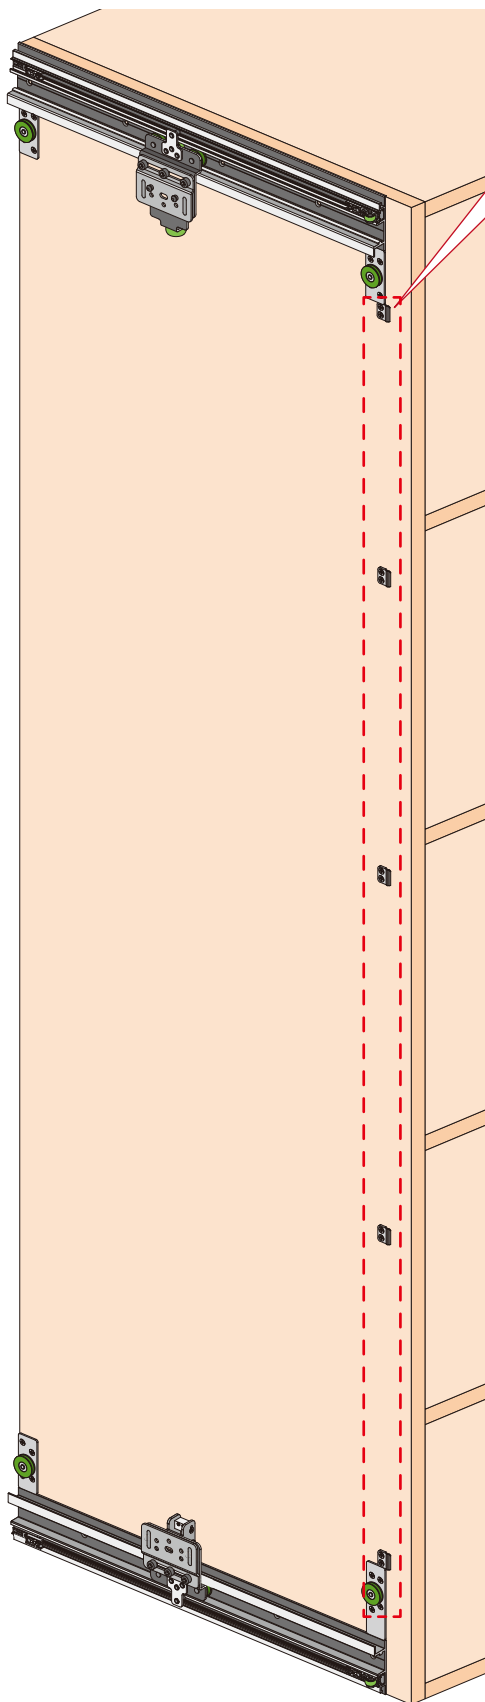


Install 5 pieces of plastic fixed parts on the cabinet evenly

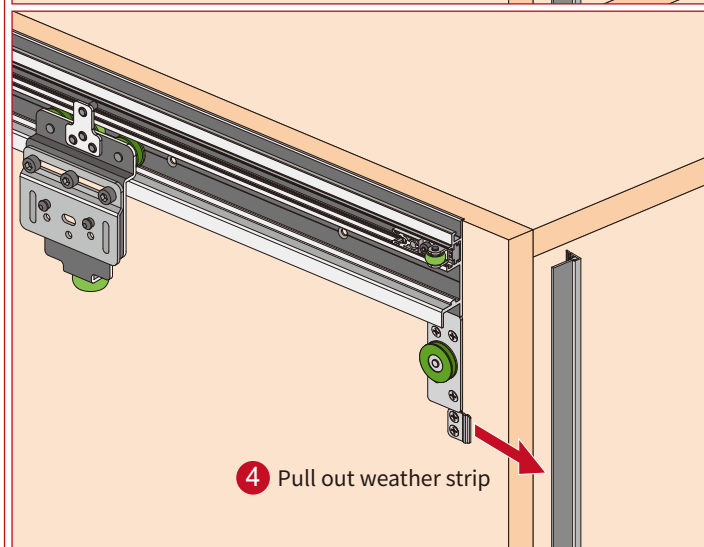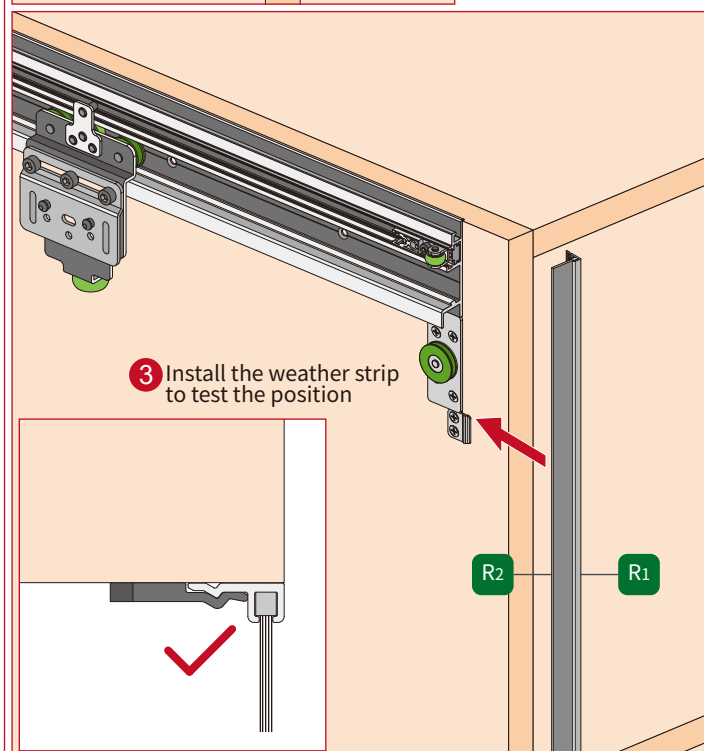

## 6-1 Install steel wire

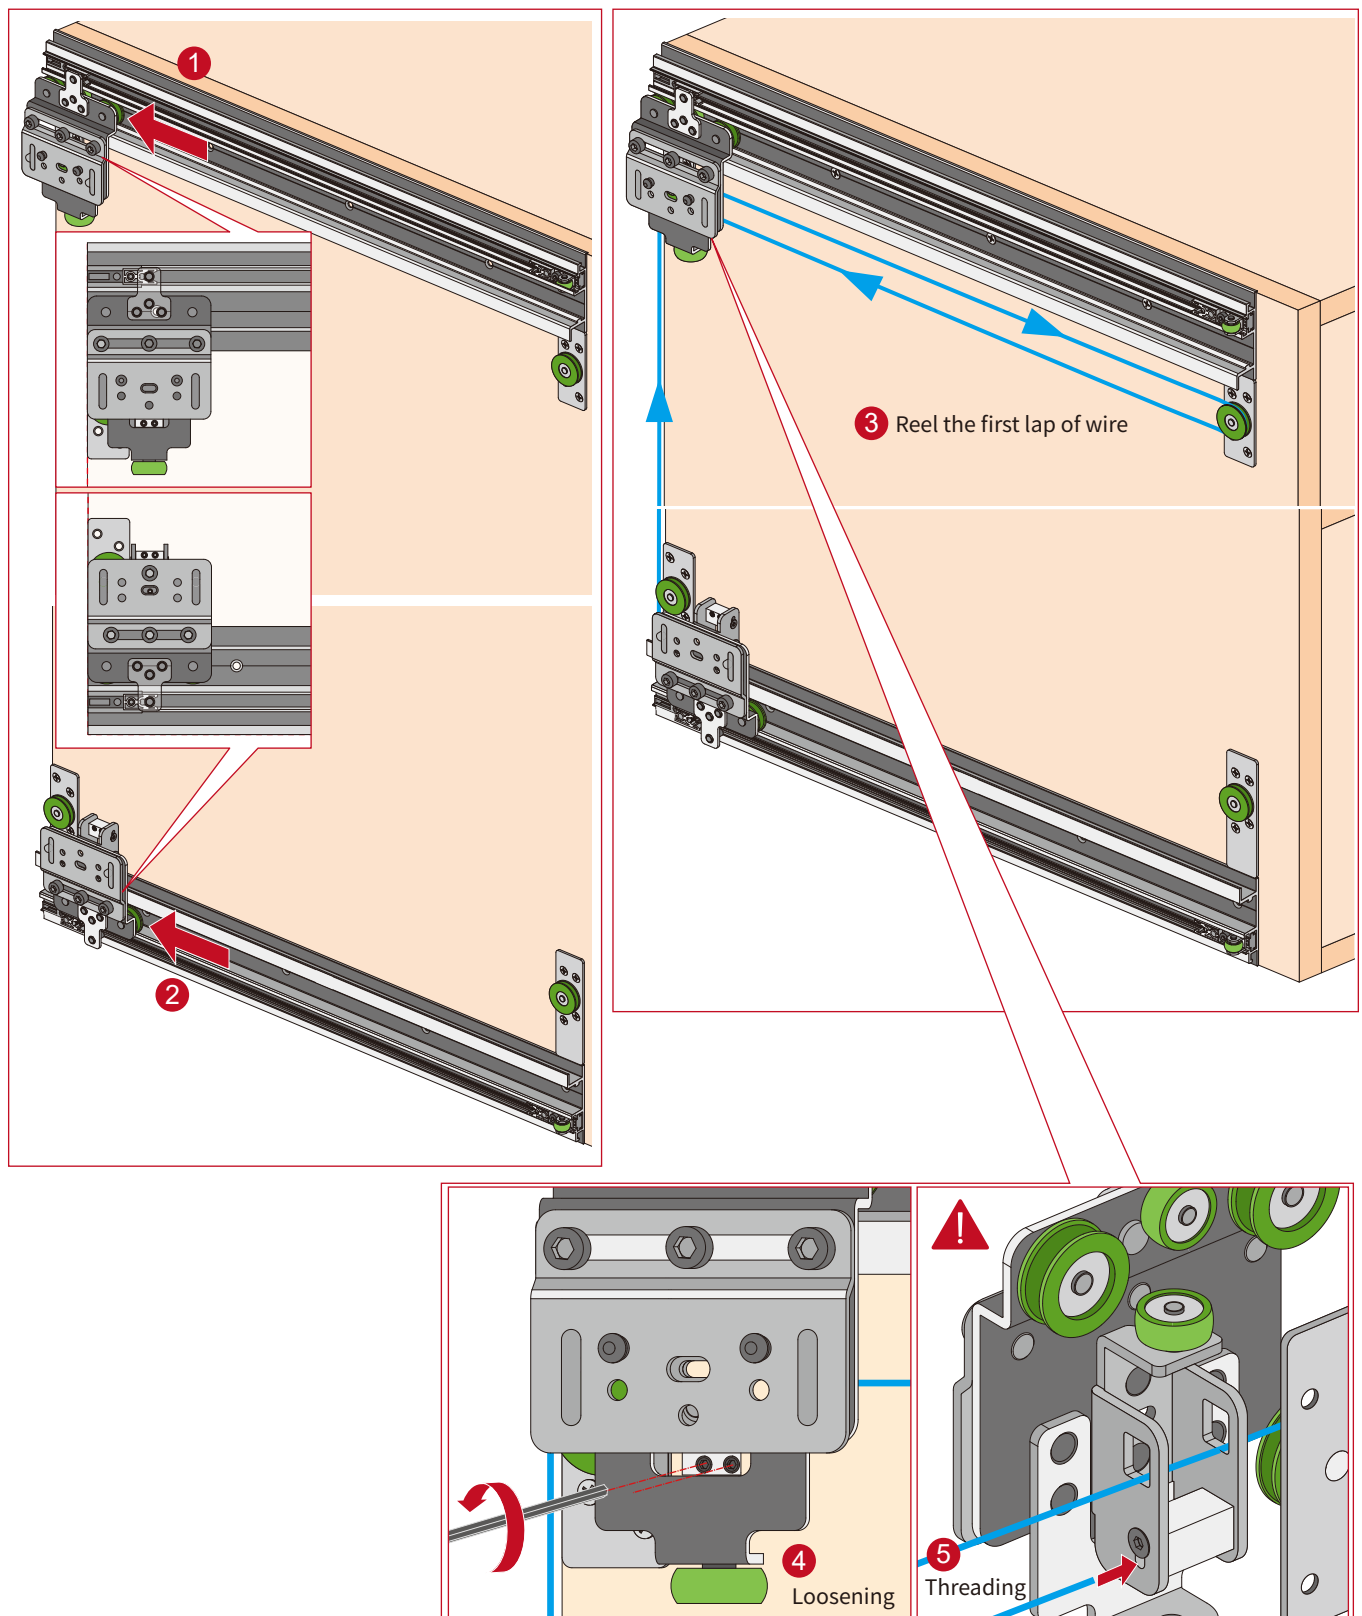


## 6-2 Install steel wire

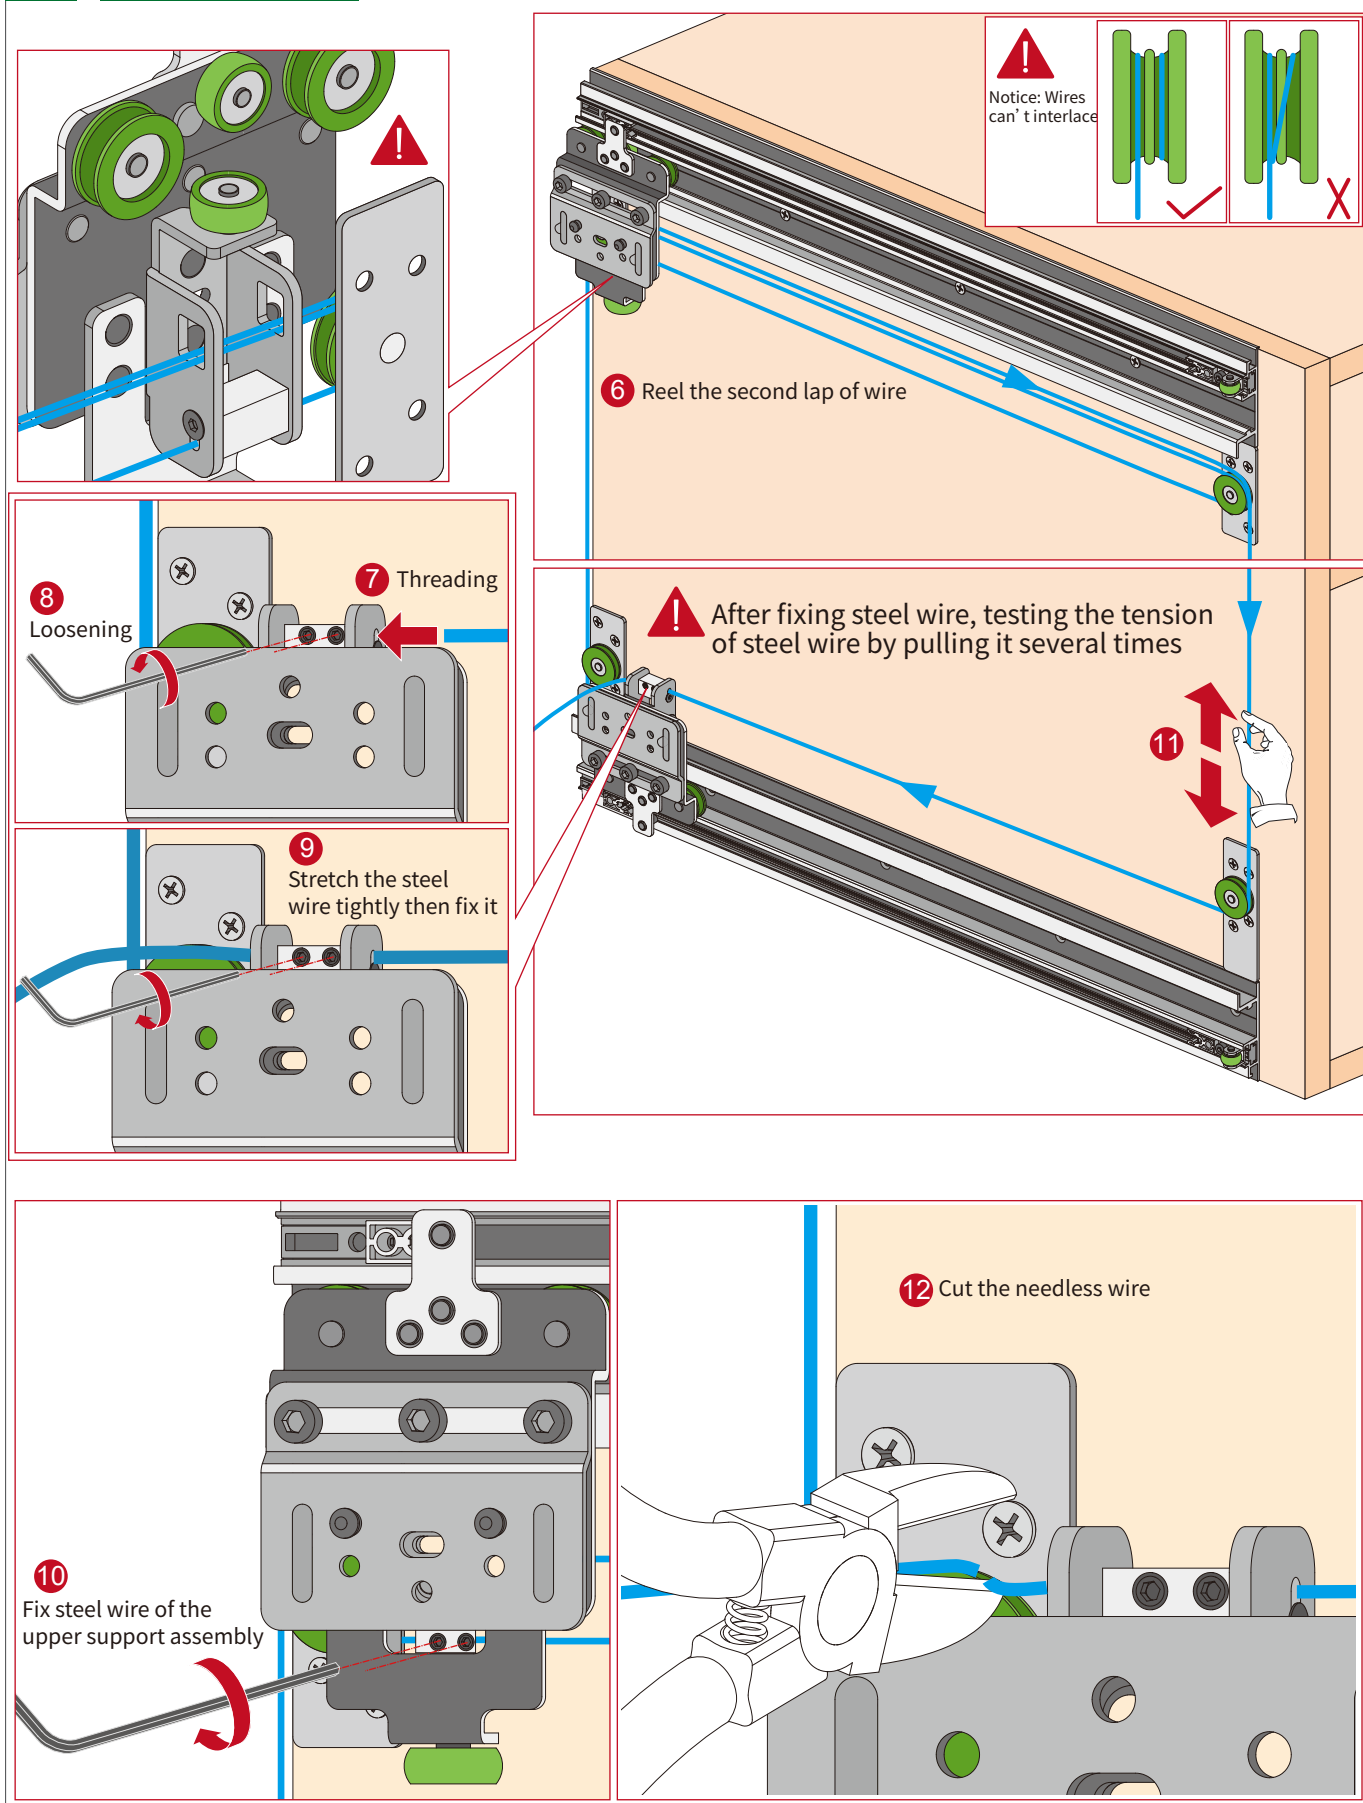




## 7 Install door panel

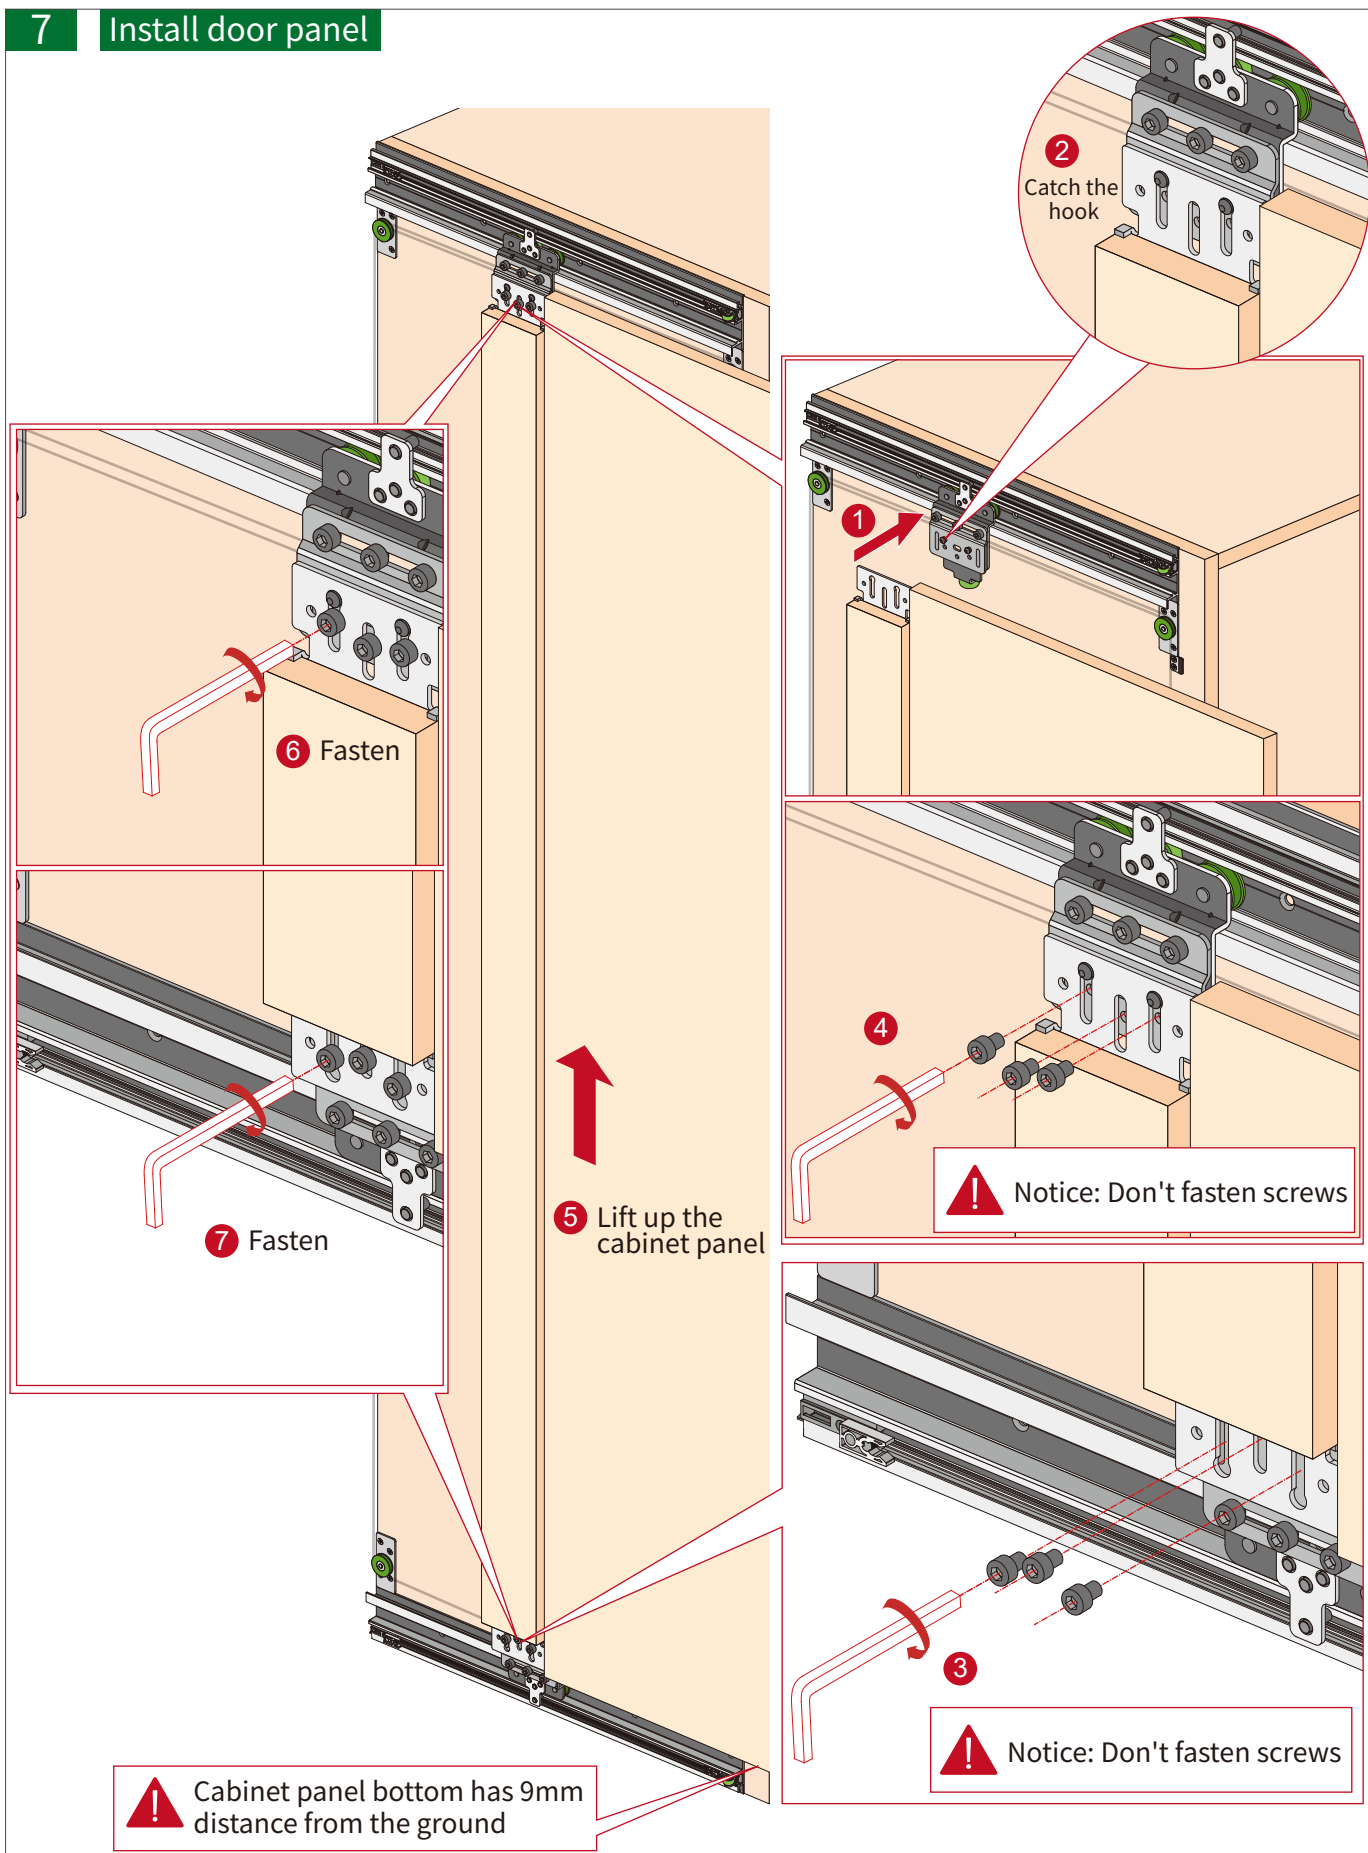

## 8 Adjust door panel

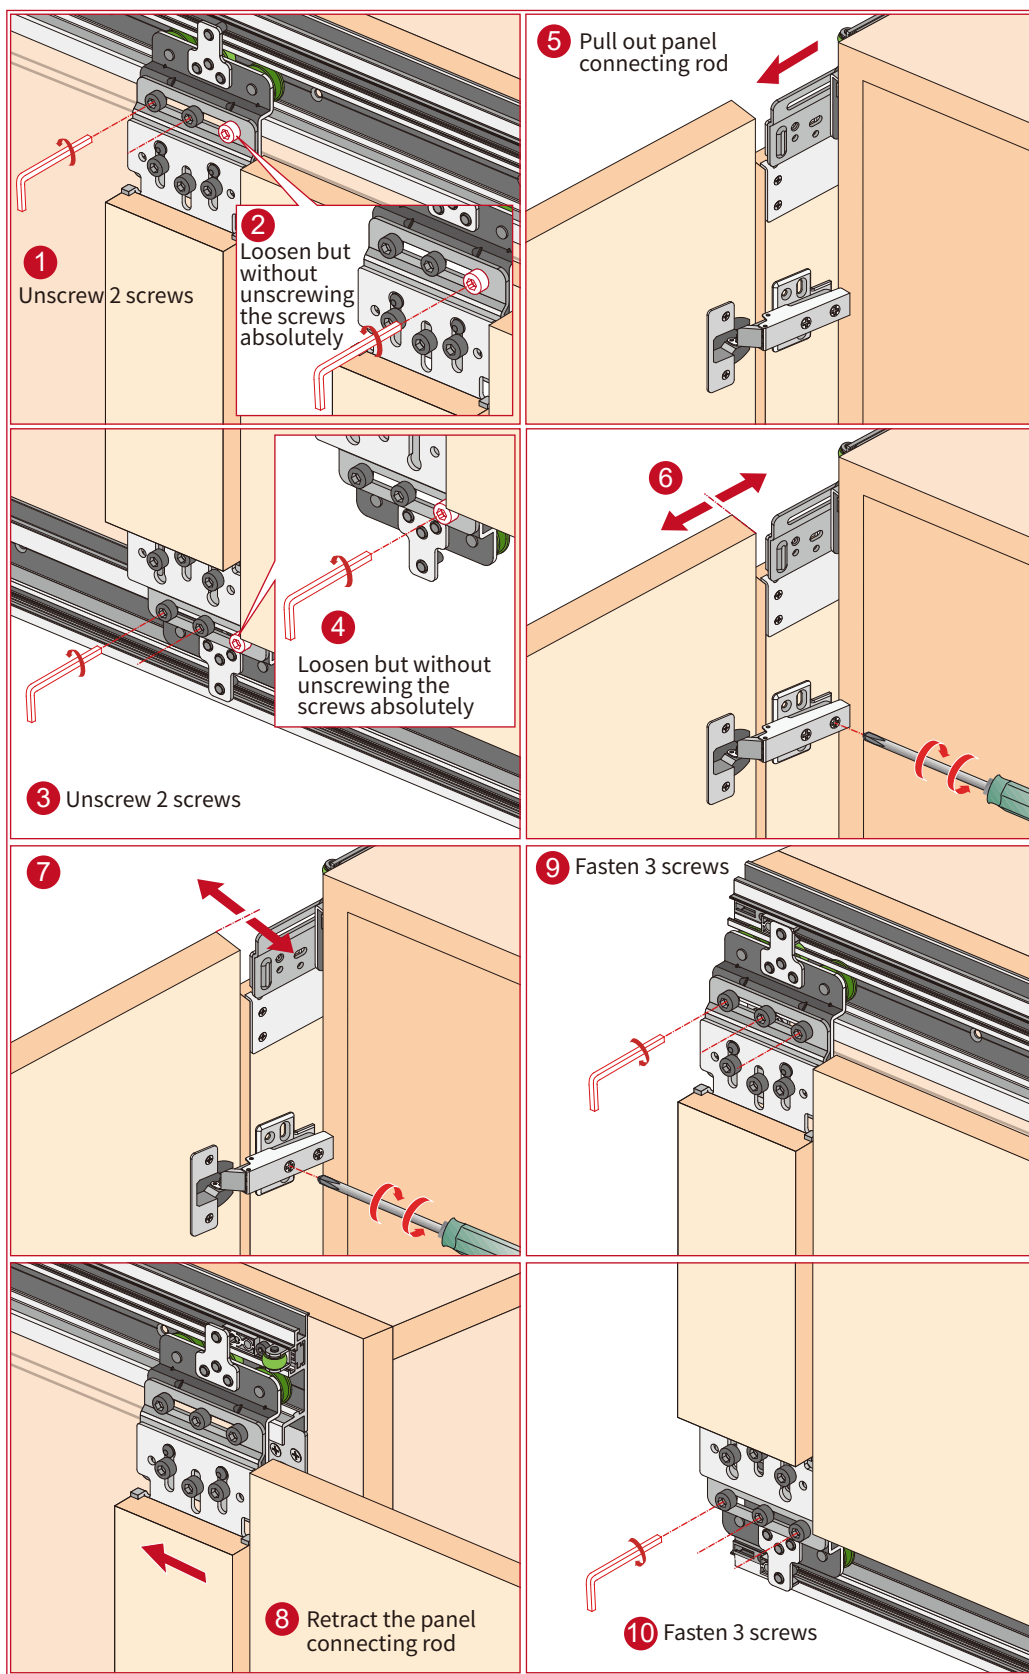

## 9 Install the connected plate & weather strip

